

SME


Since 1946



SERIES V

SERIES V

- ☆ Unique one-piece pressure die-cast tone-arm utilises the advantages of magnesium.
- ☆ Internal constrained layer damps minute residual vibration leaving the tone-arm acoustically inert.
- ☆ Fine machined cartridge platform, enamel free to avoid interface resonance.
- ☆ Stainless cross shaft, ground and thread ground. Carried in massive yoke on Ø10mm ball races. Axis at record mean level to minimise warp-wow.
- ☆ Dynamic balance. Graduated vertical tracking force (VTF) control applies 0.3g x 0.125g through resonance controlled spring.
- ☆ Stainless vertical shaft, ground and thread ground, with integral Ø16mm flange to couple shaft and yoke.
- ☆ Ø23mm steel pillar, heat treated, ground and honed, carries two Ø17mm ball races widely spaced to resist tilt.
- ☆ Anti-skate operates through tension spring and filament. Dial corresponds with VTF and has a positive OFF position.
- ☆ Lowering/raising control gives smooth positive action. Height of lift can be adjusted.
- ☆ Subsonic lateral-mode damper can be instantly adjusted or cancelled.
- ☆ Dual-lock base provides movement control with high rigidity.
- ☆ Tungsten-alloy balance carried on damped two-point suspension. Extra low-inertia design assists warp riding.
- ☆ Underslung weight housing corrects centre of gravity and provides non-reflective termination.
- ☆ Swivelling damped output-socket minimises vibration transmission in sub-chassis use.
- ☆ Fine adjustment of arm height (VTA).
- ☆ Reference lines on tone-arm facilitate VTA setting.
- ☆ Fine adjustment of horizontal tracking angle (HTA).
- ☆ New design alignment protractor sets HTA with great accuracy.
- ☆ Advanced jig/template system guarantees correct positioning.

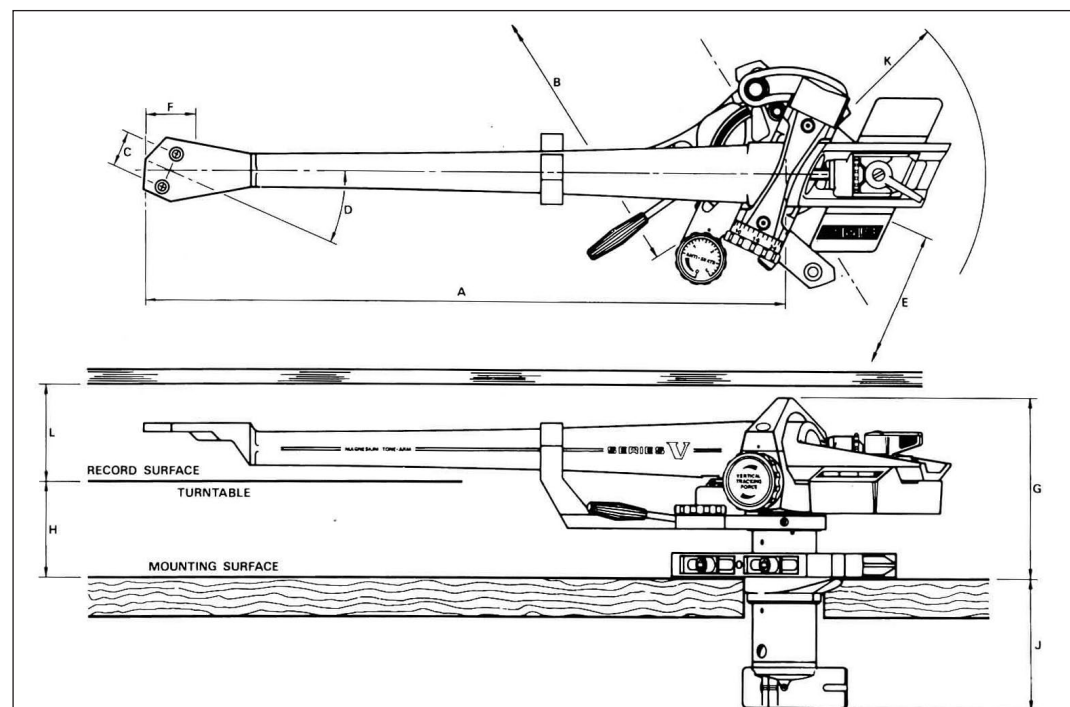

DIMENSIONS

	mm				
A – Distance from pivot to stylus	233.15				
B – Distance from pivot to turntable centre	215.35				
C – Cartridge fixing centres	12.70				
D – Offset angle	23.635°				
E – Linear offset	93.47				
F – Overhang	17.80				
G – Height above mounting surface	<table border="0" style="font-size: 0.8em;"> <tr> <td style="padding-right: 5px;">{ max</td> <td style="text-align: right;">87.90</td> </tr> <tr> <td style="padding-right: 5px;">{ min</td> <td style="text-align: right;">56.40</td> </tr> </table>	{ max	87.90	{ min	56.40
{ max	87.90				
{ min	56.40				
H – Height of record surface above mounting surface	<table border="0" style="font-size: 0.8em;"> <tr> <td style="padding-right: 5px;">{ max</td> <td style="text-align: right;">57.90</td> </tr> <tr> <td style="padding-right: 5px;">{ min</td> <td style="text-align: right;">26.40</td> </tr> </table>	{ max	57.90	{ min	26.40
{ max	57.90				
{ min	26.40				
J – Depth below mounting surface	56.75				
K – Radial clearance for balance weight	73.0				
L – Clearance between cabinet lid and record surface, assuming cartridge height at 17.0mm	35.0				

SPECIFICATION

Effective mass	10.0/11.0g				
Cartridge balance range	4.2-18g				
Vertical tracking force	0-3.0g (30mN)				
Maximum tracking error	0.012°mm				
Null points:	<table border="0" style="font-size: 0.8em;"> <tr> <td style="padding-right: 10px;">Inner</td> <td style="text-align: right;">66.04mm</td> </tr> <tr> <td style="padding-right: 10px;">Outer</td> <td style="text-align: right;">120.9mm</td> </tr> </table>	Inner	66.04mm	Outer	120.9mm
Inner	66.04mm				
Outer	120.9mm				
Audio lead:	<table border="0" style="font-size: 0.8em;"> <tr> <td style="padding-right: 10px;">Length</td> <td style="text-align: right;">1.2m</td> </tr> <tr> <td colspan="2" style="padding-top: 5px;">Balanced Silver-hybrid cable with gold plated phono plug connections to amplifier and independent ground system.</td> </tr> </table>	Length	1.2m	Balanced Silver-hybrid cable with gold plated phono plug connections to amplifier and independent ground system.	
Length	1.2m				
Balanced Silver-hybrid cable with gold plated phono plug connections to amplifier and independent ground system.					
Internal wiring:	Ultra-flexible Silver Litz.				
Output plug and socket	DIN 5-pole 240°				
Weight, net	720.0g				

SME

The Series V precision pick-up arm is available in the UK from leading audio stockists only. Distribution Overseas is made by appointed distributors in the countries concerned. Please contact our Sales Department for further information.

Since 1946